

19



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

11 Publication number:

0 180 558 ✓  
A2

12

# EUROPEAN PATENT APPLICATION

21 Application number: 85850154.7

51 Int. Cl. 4: B 25 J 9/04, B 25 J 9/10,  
B 25 J 17/02

22 Date of filing: 02.05.85

30 Priority: 18.05.84 SE 8402693

71 Applicant: ASEA AB, S-721 83 Västerås (SE)

43 Date of publication of application: 07.05.86 ✓  
Bulletin 86/19


72 Inventor: Skoog, Hans, Höjdhoppargatan 9,  
S-72241 Västerås (SE)  
Inventor: Holmquist, Ulf, Geljersgatan 19,  
S-72335 Västerås (SE)  
Inventor: Telldén, Leif, Kaserngatan 1, S-72347 Västerås  
(SE)

84 Designated Contracting States: DE FR GB IT

74 Representative: Grennberg, Erik Bertil et al, H ALBIHNS  
PATENTBYRA AB Box 7664, S-103 94 Stockholm (SE)

54 An industrial robot having two gimbal-ring type arranged swinging axes.

57 An industrial robot having a gimbal-ring type suspension incorporating two axes (I, II) renders therewith a translatorily movable arm (7) swingable. According to the invention, the translatory movement is achieved in that the gimbal-ring type suspension, which can be swung with the aid of two motors, carries a part in the form of a box-like structure (4) in which a platform (20) provided with a rack (21) can be slidably moved on guides, the platform being driven to translatory motion by a pinion (22). The platform (20) carries a fourth, a fifth and a sixth motor (28-30), of which the fourth motor is able to rotate the arm (7) about its longitudinal axis while the fifth and the sixth motor drive their respective drive shafts (33, 34) for swinging the tool holder (about 35) and rotating the same (about 36).

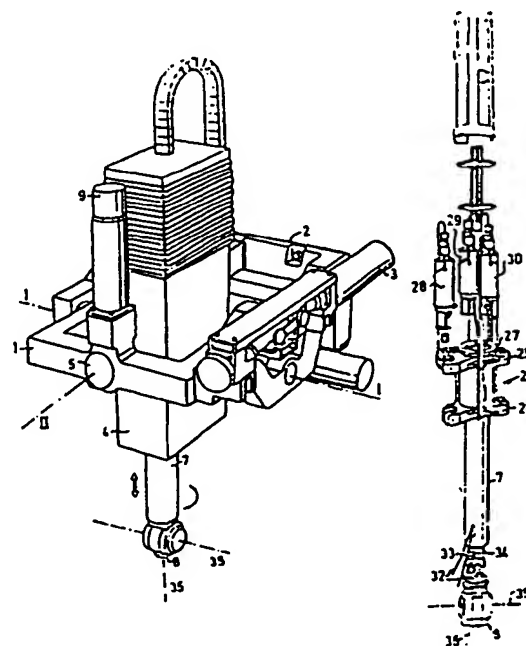

AN INDUSTRIAL ROBOT HAVING TWO GIMBAL-RING TYPE ARRANGED  
SWINGING AXES

The present invention relates to an industrial robot having a gimbal-ring type suspended part which can be swung about two mutually perpendicular axes by means of a first and a second motor, there being arranged in the gimbal-ring type  
5 suspended part an arm which is driven for translatory motion by a third motor and which has a rotatable or twist-able tool attachment mounted on an outwardly projecting end thereof.

10 An industrial robot of this kind is known from Japanese Patent Application No. 53-52776. The translatorily movable arm of this known construction comprises a screw-threaded spindle which is locked against rotation and which can be moved axially with the aid of an axially immovable nut  
15 capable of being turned by a motor.

This construction, however, affords only three degrees of freedom in space, meaning that the tool attachment can be placed in any selected position in a working range. In  
20 order to cause, for example, a gripping tool to adopt an adjustable attitude there are, in principle, required three further degrees of freedom, which means that there must be mounted on the translatorily movable arm either three motors with associated movable members or at least the  
25 three members which move internally of one another that are required when the force shall be applied from motors positioned at some other location. Since the Japanese application is based substantially on the assumption that all motors shall be mounted simply at the location carrying the

"outermost" bearing of the gimbal-ring type or universal suspension, it is not seen how this further problem can be readily solved.

- 5 The solution afforded by the universal or gimbal-ring type suspension is of principle interest, however, with respect to the possibilities of achieving rapid motion. This applies particularly to constructions which incorporate articulated arms and the like, since the fact that the  
10 drive motors must be placed adjacent to or preferably in a stationary mounting part presents a further problem.

- An object of the present invention is to provide a rapidly operating and accurate industrial robot constructed on the  
15 basis of the known gimbal-ring type suspension. In this respect the use of heavy motors and like devices shall not render the arrangement sluggish when mounted in the proximity of the principal pivot points of the system. The invention is thus based on the view that, contrary to the  
20 proposals set forth in the aforesaid Japanese application, it is unnecessary to mount all motors on the stationary mounting of the robot, but that the motors shall instead be mounted in the vicinity of points at which the principal pivot or swinging axes intersect, therewith obviating, in  
25 accordance with the invention, the requirement that they shall be immovable.

- More specifically, these and other advantages together with further objects of the invention are achieved with an  
30 industrial robot of the kind mentioned in the introduction having the characteristic features set forth in the characterizing clause of Claim 1. The gimbal-ring type suspended part suitably has the form of a box-like structure or a tube of preferably rectangular cross-section, in which  
35 guide means are arranged. The platform, which thus carries three motors with associated receivers, is in turn carried

of the arrangement and the translational movement is characterized by its sluggish mass. The mobility and speed of remaining degrees of freedom, however, are not unduly influenced hereby and the industrial robot is distinguished  
5 by its high degree of mobility in operation and the high degree of operational control afforded.

The fifth and the sixth motor each drives its respective shaft and is located at a constant distance from the tool  
10 attachment, and hence power can be transferred readily via rotational journal pins or trunnions with a minimum of play. The wrist joint located at the tool attachment may have the construction disclosed, for example, in a Swedish Patent Application Serial No .....

15 The invention will now be described with reference to an embodiment thereof illustrated in the drawings. In the drawings,

20 Fig. 1 is a total view of an industrial robot.

Fig. 2 is a sectional view of the robot illustrated in Fig. 1, with the section taken through the pivot axes of the gimbal-ring type suspension.

25 Fig. 3 is an exploded view of the translatorily movable platform with its rotatable arm and tool attachment.

The schematic view of Fig. 1 illustrates a universal or  
30 gimbal-ring type suspension comprising a mounting 2 which can be attached to a wall, a ceiling or some other bearing structure, and in which a "ring" 1 is mounted on journals for rotation about a first pivot axis I. Pivotaly mounted in the "ring" 1 on journals or trunnions 5 and 6 (of which  
35 only the journal means 5 is shown in this figure) for rotation about a swinging axis II is a box-like structure

4. The "ring" 1 is swung by a motor 3 and a lever system, merely outlined in the figure, which is activated by a spindle driven by the motor 3. Although not apparent from the figure, a similar swinging mechanism of this construction is able to swing the box-like structure about the axis II.

Extending from the box-like structure 4 is an arm 7 provided with a tool holder securing a tool 6. The arm 7 can be rotated about its longitudinal axis and extended out of and withdrawn into the box-like structure 4 as indicated by the arrows shown, in a manner hereinafter described.

Fig. 2 is a sectional view taken through the axes I and II (with the gimbal-ring type suspension located centrally). The box-like structure 4, which is thus gimbal-ring type or universally suspended, has provided therein two mutually parallel guides 10 and 11, which extend almost the whole length of the box-like structure at right angles to the axes I and II and are attached to said structure from the inside thereof with the aid of adjustable attachment means 12 and 13. A platform 20 is slidably mounted on the guides for translational movement, driven by the motor 9 (Fig. 1) via the journal means 5 rotatably mounted in both the "ring" 1 and the box-like structure 4. The principle of transmission through the trunnion or journal pin has been made the subject of Swedish Patent Application Serial No. .... Seated on the inner end of the journal means is a pinion 22 which meshes with a rack attached to the platform 20 and extending parallel to the guides 10 and 11.

The platform 20 arranged for movement in the box-like structure 4 can best be seen in Fig. 3. The two bearing carrying support plates 25 and 26 of the platform 20 are joined by a rigid structure. The arm 7 is extended through

the gear 27. The arm 7 is rotated by means of a motor 28 whose outward shaft drives the gear 31 via an intermediate gear. The shaft to the intermediate gear is made adjustable, so that mating of the two gears can be adjusted to exclude any play. The two motors 29 and 30 are attached to the gear 27 and thus accompany the rotational movement of the gear, and therewith the arm 7, effected by the motor 28. The cables supplying the motors 28, 29 and 30 together with other devices, such as compressed air hoses 32 serving the tool attachment and necessary to the action of the robot will consequently become tangled and twisted. The solution to the problem resulting herefrom has been made the subject of a separate Swedish Patent Application Serial No. ....

Each of the motors 29 and 30 drives its respective shaft 33 and 34 which in turn respectively effect a swinging or rotational motion about an axis 35 which extends at right angles to the axial direction of the shaft 7 and about an axis 36 which extends at right angles to the shaft 35, whereby the actual tool holder obtains two further degrees of movement. The industrial robot is therewith equipped with six degrees of freedom and thus theoretically has full freedom of motion within its definition range.

It will be noticed that all degrees of freedom, with the exception of one, are achieved by rotational or twisting motion about a horizontal or about a vertical axis, and in the main through points which lie close to the centre of gravity of the rotated part and with the major part of the movable mass close to the axis of rotation, so that inertia forces are low. Only one degree of freedom is associated with translatory motion whose inertia may have significance. Consequently, the tool holder can be subjected to very high acceleration in extent of 1000 in respect of five of the degrees of freedom. The precision to which the

As an example in this respect, a test plant having the following data was constructed.

5 The working area had the form of a truncated cone having a height of 350 mm, half the cone angle  $30^{\circ}$ , and the wider base part being of circular shape with a radius of 500 mm. Within this approximative working area there was achieved a setting accuracy in respect of the tool attachment of 0.1 mm or better.


CLAIMS


1. An industrial robot having a gimbal-ring type or  
universally suspended part (4) which can be swung about two  
mutually perpendicular axes (I,II) by means of a first and  
a second motor, there being arranged in the gimbal-ring  
5 type suspended part a translatorily movable arm (7)  
provided on a protruding end thereof with an axially  
rotatable tool attachment (8), characterized in that the  
translatory movement of the arm (7) is achieved through the  
attachment of said arm to a platform (20) which is mounted  
10 on guides (10,11) located within the gimbal-ring suspended  
part (4) and driven for translatory movement along the  
guides by a third motor (9), and on which platform three  
further motors (28-30) are mounted including a fourth motor  
(28) whose shaft connects through gear engagement with a  
15 gear (27) which is rotatably mounted on the platform, and  
fixed to the arm (7) there being attached to said gear a  
fifth (29) and a sixth (30) motor each connected to a  
respective shaft (33,34) which extend to the tool  
attachment and which are arranged to rotate said tool  
20 attachment (8) about an axis (35) extending at right angles  
to the arm and about an axis (36) which extends at right  
angles to the aforesaid axis.

2. An industrial robot according to Claim 1, characterized  
25 in that the gimbal-ring type suspended part accommodating  
the fourth, fifth and sixth motors (28-30) comprises a  
box-like structure (4) in which there are attached the two  
guides (10,11) along which the platform (20) can be  
slidably moved through the agency of a rack (21) mounted  
30 thereon and in meshing engagement with a pinion (22)  
rotatably mounted on the box-like structure and coupled to  
the driving motor (1).




3. An industrial robot according to Claim 2, characterized in that the platform incorporates two carrier plates (25,26) each of which is provided with two guide bearings and which are mutually connected to form a rigid platform assembly (20), the third, fourth and fifth motors (28-30) being mounted above the upper (25) of the two said carrier plates.

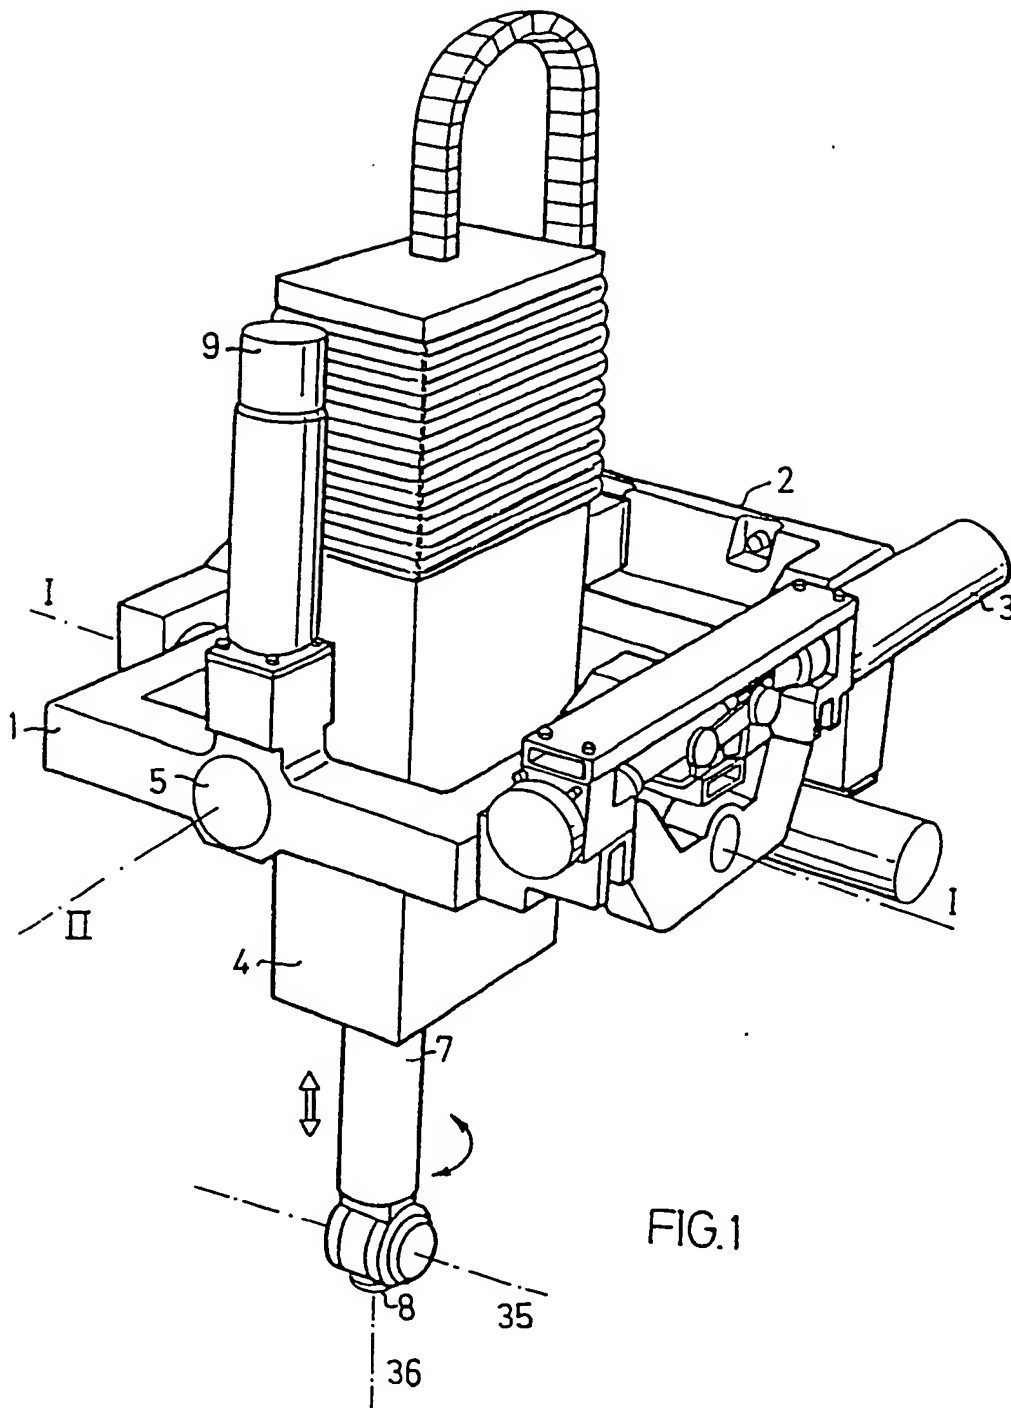

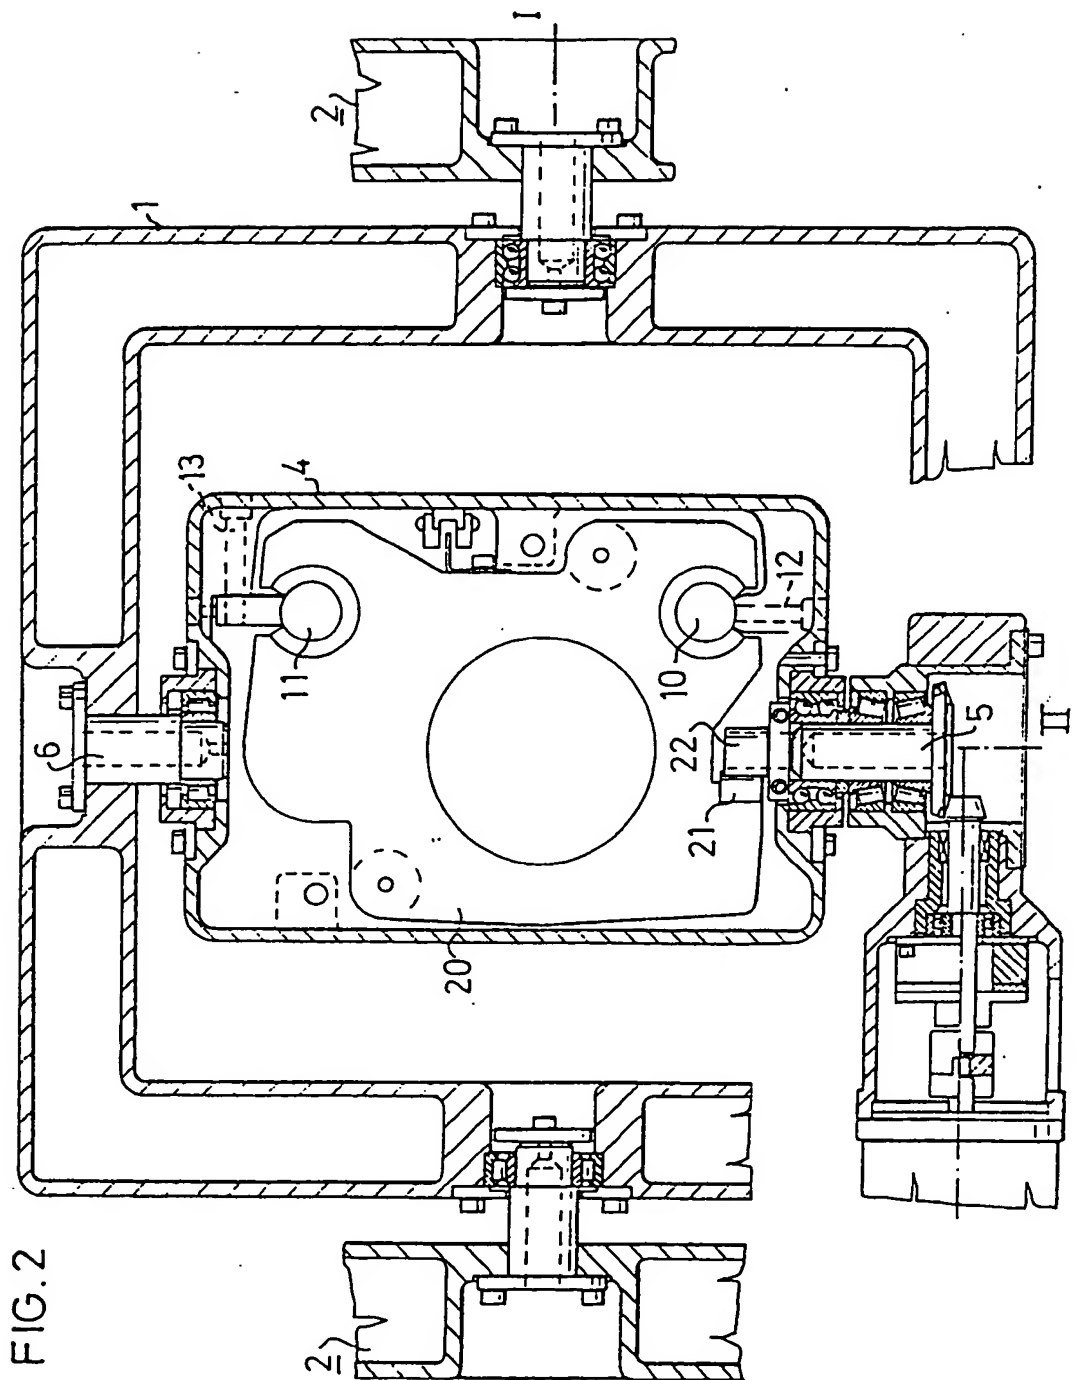

3/3

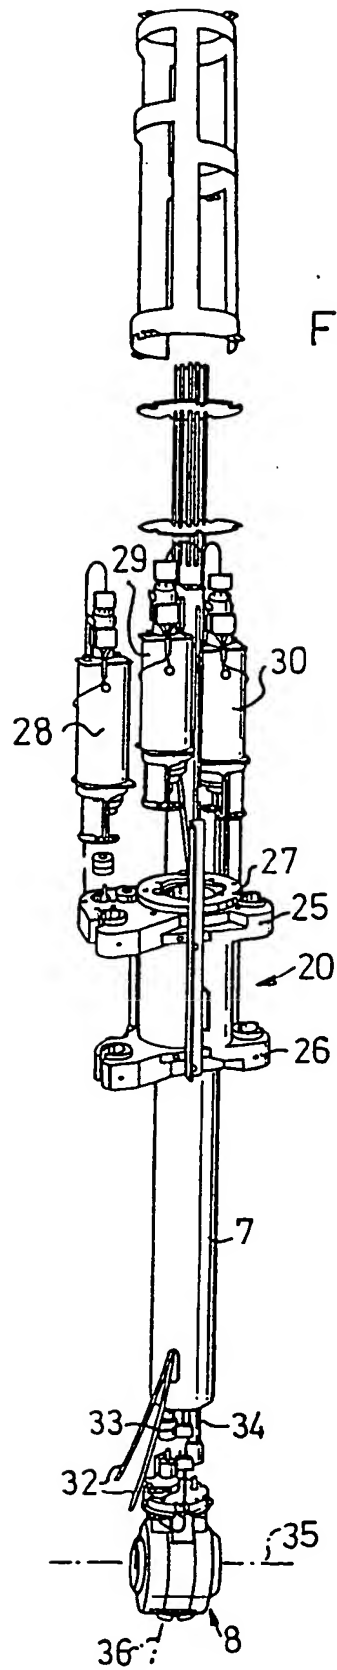

**EUROPEAN PATENT APPLICATION**

Application number: 85850154.7

Date of filing: 02.05.85

Int. Cl.<sup>3</sup>: **B 25 J 9/04**  
**B 25 J 9/10, B 25 J 18/02**  
**B 25 J 17/02**

Priority: 18.05.84 SE 8402693

Date of publication of application:  
07.05.86 Bulletin 86/19

Date of deferred publication of search report: 02.09.87

Designated Contracting States:  
DE FR GB IT

Applicant: ASEA AB

S-721 83 Västerås(SE)

Inventor: Skoog, Hans  
Höjdhoppgatan 9  
S-72241 Västerås(SE)

Inventor: Holmquist, Ulf  
Gelljersgatan 19  
S-72335 Västerås(SE)

Inventor: Telldén, Loff  
Kaserngatan 1  
S-72347 Västerås(SE)

Representative: Grennberg, Erik Bertil et al,  
HALBIHNS PATENTBYRA AB Box 7664  
S-103 94 Stockholm(SE)

An industrial robot having two gimbal-ring type arranged swinging axes.

An industrial robot having a gimbal-ring type suspension incorporating two axes (I,II) renders therewith a translatorily movable arm (7) swingable. According to the invention, the translatory movement is achieved in that the gimbal-ring type suspension, which can be swung with the aid of two motors, carries a part in the form of a box-like structure (4) in which a platform (20) provided with a rack (21) can be slidably moved on guides, the platform being driven to translatory motion by a pinion (22). The platform (20) carries a fourth, a fifth and a sixth motor (28-30, of which the fourth motor is able to rotate the arm (7) about its longitudinal axis while the fifth and the sixth motor drive their respective drive shafts (33, 34) for swinging the tool holder (about 35) and rotating the same (about 36).


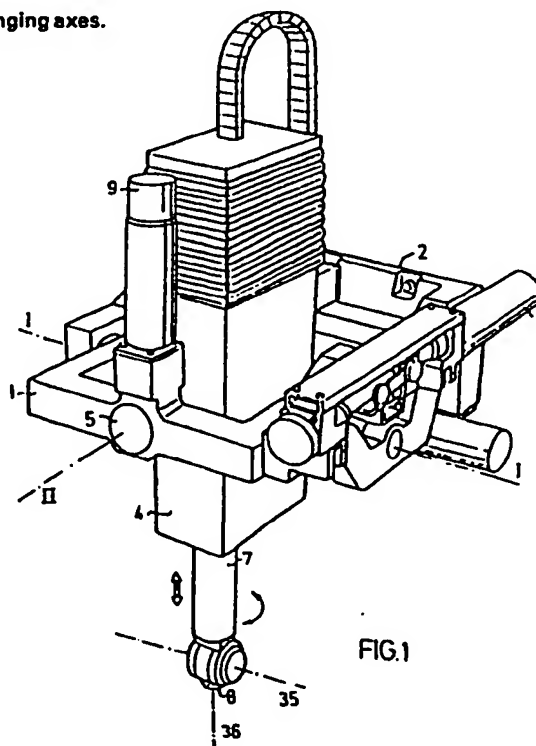


FIG.1



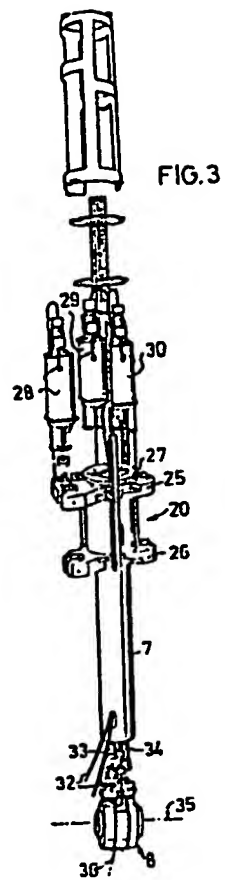

European Patent  
Office

# EUROPEAN SEARCH REPORT

0190558

Application Number

EP 85 9 0104

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC Class)
A	US-A-4 115 684 (LINDEOM) * Column 4, lines 8-66 *  -----	1	B 25 J 17/02 B 25 J 17/10 B 25 J 18/02 B 25 J 17/02
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC Class)  B 25 J

Place of search

THE HAGUE

Date of completion of the search

09-06-1987

Examiner

LAMMINEUR P.C.G.

### CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on or after the filing date  
D : document cited in the application  
L : document cited for other reasons  
  
Δ : member of the same patent family corresponding document